

Vinyl Corp. Roof Edge Flashing – VFLC Series



VINYL CORP.
A
DIETRICH
METAL FRAMING
COMPANY

- Most cost-effective, corrosion-free product suitable for coastal applications
- Installs with same tools always used, no new tools needed
- Installs easily with standard nailing patterns
- Flexible enough to accommodate variable pitches, radius roof lines, and other contoured applications
- Vinyl Products are rugged enough to bounce back from rough handling during shipping and installation. No dings, dents, or bent edges



Design

Protects roofing systems from water damage along entire eave

Material

PVC exterior grade high impact
UV resistant

Color

Standard White-Easy to paint-No primer required


Corrosion Resistance

Vinyl Corp PVC flashing is impervious to rust, corrosion, electrolysis, and corrosive coastal areas

Performance

Vinyl Corp's VRT products exceed the highest wind requirements established by FM Approvals

Note: VRT products are not recommended for use with hot tar roof installations.

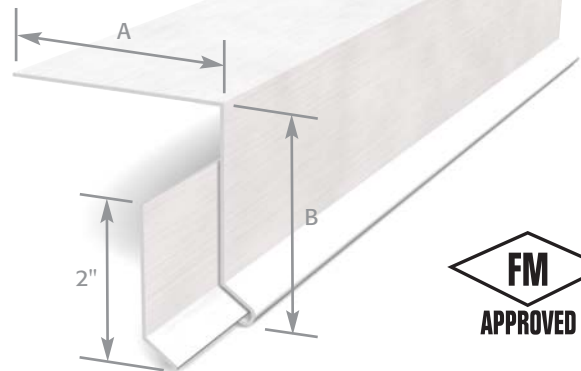

VFLC Series Roof Edge Flashing

Product Code	Size			Packaging
	A (in)	B (in)	Length (ft)	Pcs/Carton
VFLC3x3	3	3	10	25
VFLC3.5x3.5	3-1/2	3-1/2	10	25
VFLC4x3*	4	3	10	25
VFLC4x4	4	4	10	25

Note: Other sizes and roof pitches available upon request.

* FM Approval pending for noted sizes.

**For more information call 1-800-648-4695,
or Log on to www.vinylcorp.com**

