

## Vinyl Corp. Roof Edge Flashing – VFL Series

- Most cost-effective, corrosion-free product suitable for coastal applications
- Installs with same tools always used, no new tools needed
- Installs easily with standard nailing patterns
- Flexible enough to accommodate variable pitches, radius roof lines, and other contoured applications
- Vinyl Products are rugged enough to bounce back from rough handling during shipping and installation. No dings, dents, or bent edges



**VINYL CORP.**  
A  
DIETRICH  
METAL FRAMING  
COMPANY



**VRT™**  
Vinyl Roofing Trims

### Design

Protects roofing systems from water damage along entire eave

### Material

PVC exterior grade high impact  
UV resistant

### Color

Standard White-Easy to paint-No primer required


### Corrosion Resistance

Vinyl Corp PVC flashing is impervious to rust, corrosion, electrolysis, and corrosive coastal areas

### Performance

Vinyl Corp's VRT products exceed the highest wind requirements established by FM Approvals

**Note:** VRT products are not recommended for use with hot tar roof installations.

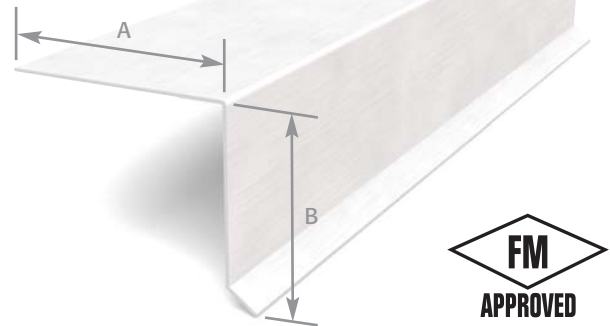

### VFL Series Roof Edge Flashing

Product Code	Size			Packaging Pcs/Carton
	A (in)	B (in)	Length (ft)	
VFL2x2	2	2	10	25
VFL3x1.75	3	1-3/4	10	25
VFL3x3*	3	2-7/8	10	25
VFL4x2*	4	2	10	25
VFL4x3*	4	2-7/8	10	25

Note: Other sizes and roof pitches available upon request.  
\* FM Approval pending for noted sizes.

**For more information call 1-800-648-4695,  
or Log on to [www.vinylcorp.com](http://www.vinylcorp.com)**